

The Zonix™

FP4620 Series




SPECIFICATION SHEET



Product Specifications Subject To Change

The Zonix™ Fan Assembly – FP4620**

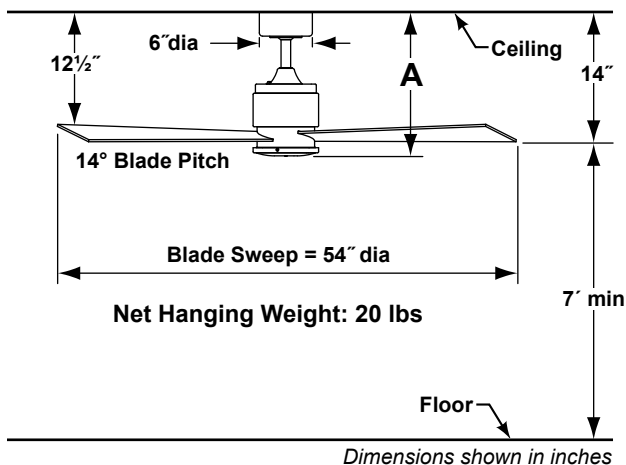


| Available Finish | |
|------------------|-------------------|
| OB | Oil-Rubbed Bronze |
| SN | Satin Nickel |



Optional Light Kit

LK4620**



Optional Satin Nickel Blade Set

B4400SN

| Distance from Ceiling to Bottom of Fan | A |
|--|------|
| Fan w/6" downrod | 15½" |
| Fan w/12" downrod | 21½" |
| Fan w/18" downrod | 27½" |
| Fan w/24" downrod | 33½" |
| Fan w/36" downrod | 45½" |
| Fan w/48" downrod | 57½" |
| Fan w/60" downrod | 69½" |
| Fan w/72" downrod | 81½" |

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 18 motor is designed for optimal performance with this fan.

FAN SPEEDS:

4 fan speeds with reversing switch (on top of the motor). High – 150 rpm; Med High – 115 rpm; Med – 85 rpm; Low – 50 rpm

CONTROL OPTIONS:

The fan-only wall control (CW40) is included. Reversing switch located on fan housing. Installation and operating instructions provided with control. Optional controls are: C2 wall control, C4 hand-held remote with receiver.

LIGHTING OPTION:

The optional 1-bulb downlight fixture (13 watt, Energy-Efficient CFL bulb included) is available and sold separately. Maximum downlight wattage not to exceed 13 watts. **NOTE: Fan supplied with fan only wall control. Light kit will require an additional control/switch.**

DOWNROD OPTIONS:

The Zonix™ fan comes with a 1" Dia. x 6" (DR1-6) downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Zonix™ fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call tech support for more information.

BLADE SETS:

A set of 3 reversible (cherry/walnut) wood blades are included. Optional set of 3 Satin Nickel blades (B4400SN) are available and sold separately. Not recommended for Damp Location.

DAMP LOCATION:

Fan not rated for Damp Location usage.



10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com

